


Type	MVF 3/2-1/4E
Connection thread size	G 1/4"
Voltage	24 V DC
Ambient temperature	-5° up to +40°C
Valve housing type	MFH-3-1/4-EX
Classification (ATEX)	Group II, Category 2 GD c T4 T130°C
Coil	MSFG 24 DC-K5-M-EX
Classification (ATEX)	Group II, Category 2 GD EEx m II T5
Silencer	Plastic, G 1/4"
Cable length	5,0 m
Bestell-Nr.	61700413

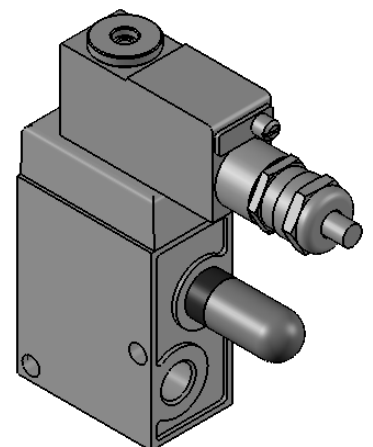


alle Schutzrechte vorbehalten  
all rights reserved  
tous droits réservés

Angebot Nr.: / Quotation no.: / Offre no.:

Bestell Nr.: / Part no.: / No d'article:  
**61700413**

## 3/2-Wege-Magnetventil

Ansichtszeichnung  
Overview drawing

**NetterVibration**   
Fritz-Ullmann-Straße 9, 55252 Mainz-Kastel  
Tel.: +49 6134 2901-0, [www.NetterVibration.com](http://www.NetterVibration.com)